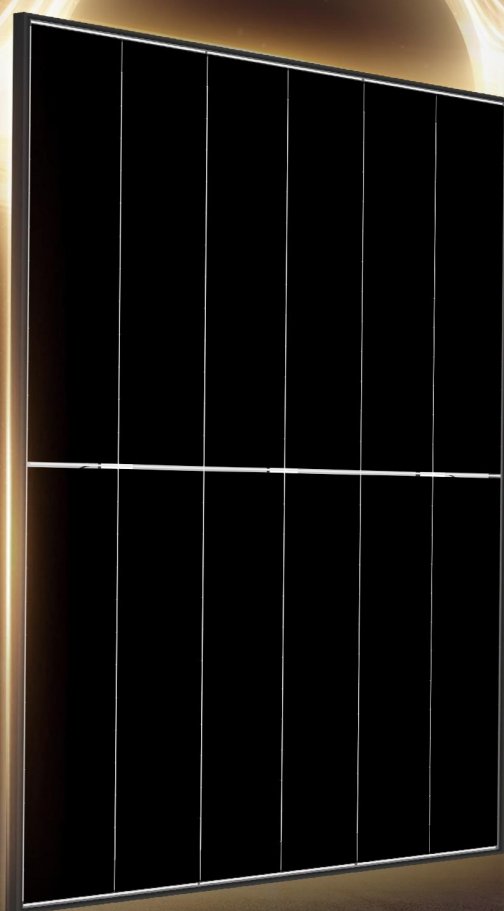


NEOSTAR

Draft

2P+48w Dual-Glass Monofacial
470W-500W



Technical Features:

 Partial Shading Optimisation

 Better Temperature Coefficient

 High Temperature Restriction

 Micro-crack Resistance

 Higher Power

 Lower BOS

 More Aesthetic Values

 Zero gap Technology



red dot winner



Product
Warranty

Extendable to 25years*



Performance
Warranty

IEC61215/IEC61730
IEC61701/IEC62716

ISO9001:ISO Quality Management System
ISO14001:ISO Environmental Management System
ISO14064:Greenhouse Gas Verification Statement
ISO45001:ISO Occupational Health and Safety Management System



Ariel Green



500W

Output

25.0%

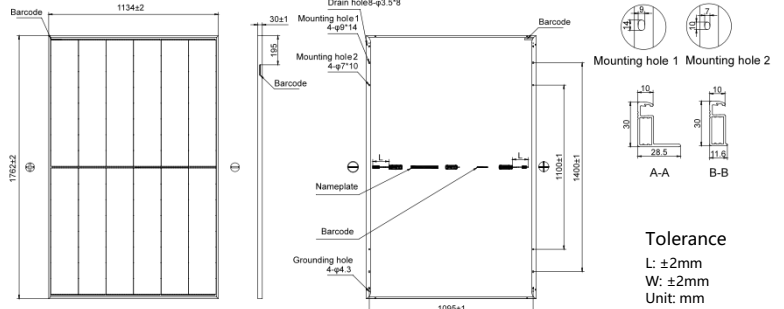
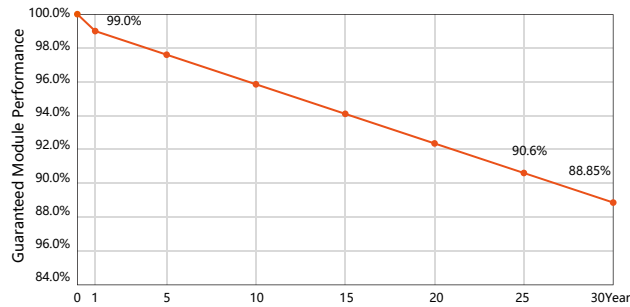
Efficiency

≤1%

First-year Degradation

≤0.35%

Annual Degradation from Year 2-30

30-year Linear Performance Warranty**Electrical Characteristics** (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)

Power Tolerance: 0~ + 3%

Module Type	AIKO-A470-GRH48Dw		AIKO-A475-GRH48Dw		AIKO-A480-GRH48Dw		AIKO-A485-GRH48Dw		AIKO-A490-GRH48Dw		AIKO-A495-GRH48Dw		AIKO-A500-GRH48Dw	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	470	361	475	365	480	369	485	373	490	377	495	381	500	385
V _{oc} [V]	35.00	32.90	35.19	33.08	35.33	33.21	35.57	33.44	35.72	33.58	35.86	33.71	36.04	33.90
V _{mp} [V]	30.74	28.86	30.90	29.02	31.05	29.15	31.19	29.27	31.35	29.44	31.51	29.58	31.65	29.70
I _{sc} [A]	16.43	13.20	16.52	13.27	16.63	13.36	16.71	13.42	16.79	13.49	16.90	13.58	16.98	13.65
I _{mp} [A]	15.29	12.51	15.37	12.58	15.46	12.66	15.55	12.74	15.63	12.81	15.71	12.88	15.80	12.96
Module Efficiency	23.5%		23.8%		24.0%		24.3%		24.5%		24.8%		25.0%	

Product Specification

Cell Type	N-Type ABC
Front Cover	2.0mm coated semi tempered glass
Rear Cover	2.0mm semi tempered glass
Frame	Black anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) ±1200mm
No. of Cells	96(6*16)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4-EVO2A
Weight	24.2kg±3%
Dimension	1762*1134*30mm
Package Detail	37pcs per pallet / 222pcs per 20'GP / 962pcs per 40'HC

Temperature Ratings (STC)Temperature Coefficient of I_{sc} + 0.05%/ °CTemperature Coefficient of V_{oc} - 0.22%/ °CTemperature Coefficient of P_{max} - 0.26%/ °C

NOCT(Nominal Operating Cell Temperature): 45°C (±2°C)

Installation Guide

Operation Temperature	-40°C - +70°C
Maximum Series Fuse Rating	30A
Protection Class	Class II
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class A

**Official Website**Scan to
visit AIKO**Installer Community**Get rewarded
for installing AIKO

*AIKO reserves right to update the specification without notice
 *Optional Ariel Green coverage is available upon request
 202608_V4.1_EN